

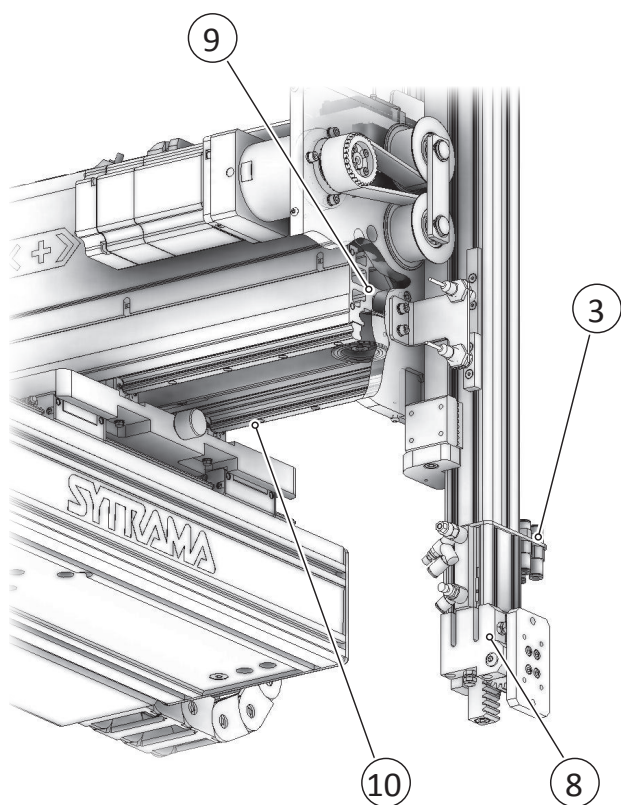


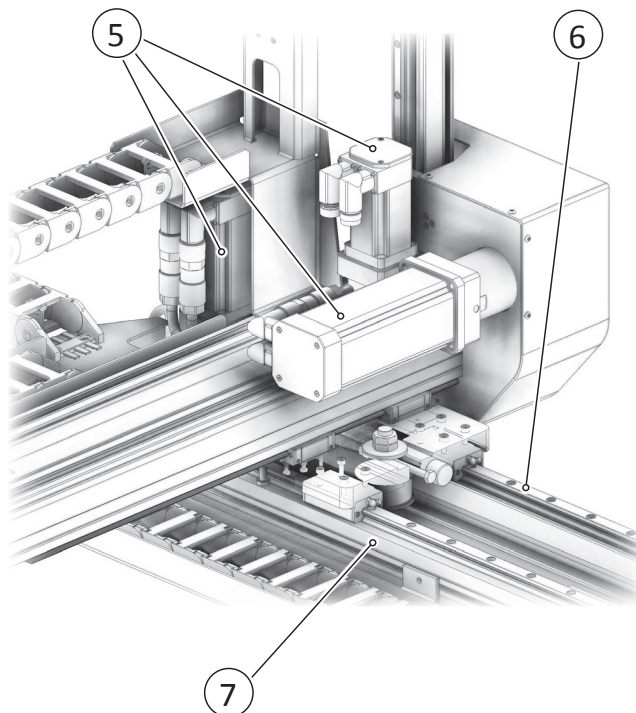

		Transverse axis	Vertical axis	Extraction axis	OCP control panel
Working stroke	mm (in)	ONE-S 1300 (51.18")	1000 (39.37")	350 (13.78")	Visual programming language
		ONE-L 1500 (59.05")	1000 (39.37")	350 (13.78")	Easy positioning teaching
Max speed	m/s (in/sec)	1,8 (70.86)	3 (118.1)	0,9 (35.43)	Standard palletizing program
Gripper unit overturning	(pneumatic)	90°			Controls up to 4 axis
Wrist swivel	(pneumatic)	0° - 90° / 0° - 180° (Optional)			Storage for 100 programs
Vacuum circuit		N°1 12 l/min (0.42 cubic ft/min)			Multiple password protection level
Pneumatic circuit		1			Immediate switching between 8 language available
Max applicable weight		3 kg (11Lbs.)			Program backup/restore with compact flash
Power supply		220Vac TN 1,3 kW			Control monitors system conditions and maintenance status
Air supply		6 bar 600 kPa (90PSI)			Remote assistance
Suitable injection moulding machines		40-250 ton (50-275 US Tons)			
<i>Special strokes and devices available on request</i>					

ONE

SYTRAMA

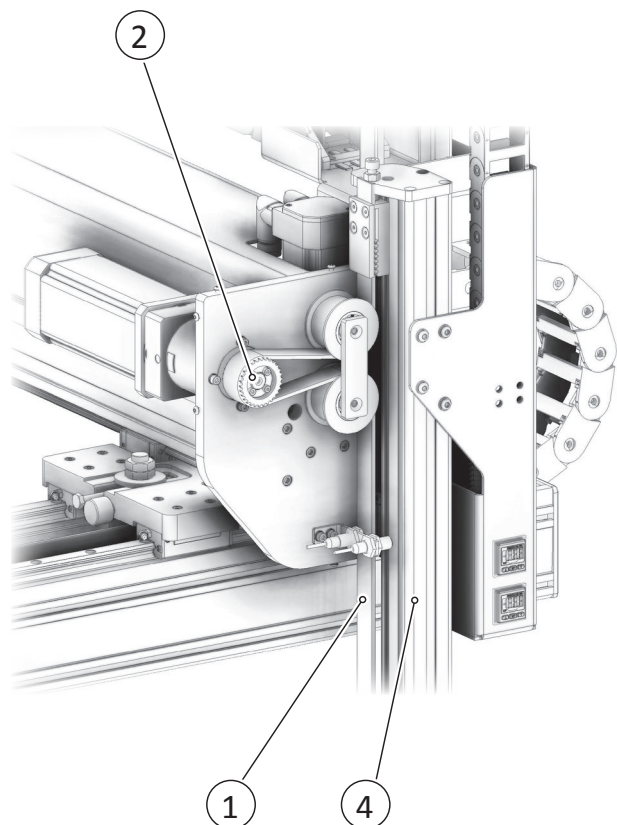

1. *Y axis high power belt*
2. *low maintenance and accurate belt transmission*
3. *easy connection for pneumatic utility*
4. *special aluminum designed for high stiffness*
5. *brushless motor*
6. *Z axis high-precision guiding system with sliding block on prismatic guides*
7. *Z axis high power belt*
8. *90° pneumatic overturning*
9. *special aluminum designed for high stiffness*
10. *X axis high-precision guiding system with sliding block on prismatic guides*